

TECHNICAL REPORT



TESTING DATA

Technical Support

Compressive Strength: 7849 PSI
(28 Day Cure)

Flexural Strength: PSI 1336

Shear (adhesion) Strength: 160

Tensile Strength: PSI 463

Saturated Weight: 12

Water Absorption: 11%


Equilibrium Density: 93

Freeze/Thaw Characteristics: Weight
Change %: 1

Fireproof: Yes, will not contribute to
smoke or flame development

Weight: Shipping weight is 7 to 12
pounds per square foot.

Average Thickness: 1.5 to 3 inches

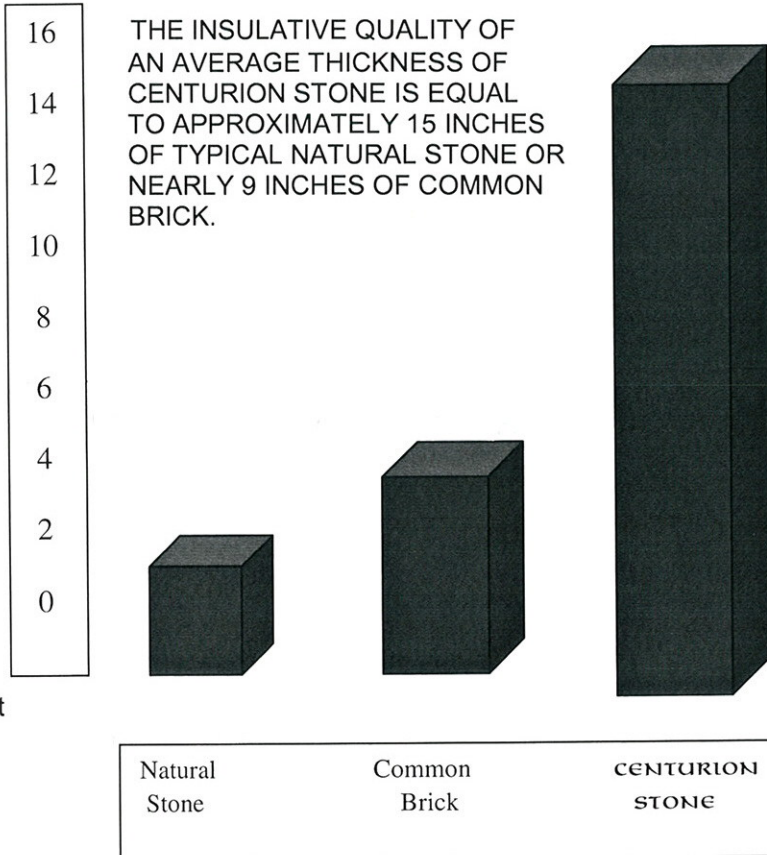

Colorfastness: Existing applications show no undesirable change in color after years of weathering. Hand crafted coloring ensures our stone products have the random appearance of natural stone.

Packaging: Centurion Stone is shipped in the most versatile packaging – 8 cardboard boxes inside a cardboard weather resistive corrugated box on wooden skids. This system offers ease of shipping, handling and less damage.

Manufacturing Site: Centurion manufactures product at one location only in Nashville, TN. One location assures the same raw materials are used in manufacturing the products. Multi-site manufacturers must use local raw materials that may vary testing results from plant to plant.

Corporate Headquarters
50 Van Buren St.
Nashville, TN 37208

(615) 256-6694 Fax (615) 726-1795

CENTURION® PRODUCTS, INC.

REPORT NO. CEN1008